

BASIC 100.040-060-080-100



- Reinforced glass fibre polyester parts, sandwich construction, insulated with polyurethane foam core.
- Textured surface in grey RAL 7032
- Protection class: IP65

Arrangement:

Floor: Sandwich-floor with PU-foam core 25 mm (standard)

- Upon special request: GRP 5 mm
- GRP 5 mm with opening size (see data sheet SDS10979, floor version C BASIC)

Options:

- MP: Mounting plate

- Vertical c-rails provided at the rear wall
- Door with 3-point locking device and burglary-resistant swing handle with profile cylinder to DIN 18252


FA/FS:

- Acrylic glass
- Safety glass window

C-VA:

Vertical c-rails in stainless steel instead of aluminum

- GO: Antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB: Floor fastening
- WA: Wall fastening
 - Inside
 - Outside
- SZ: Ground vault for installation in the ground

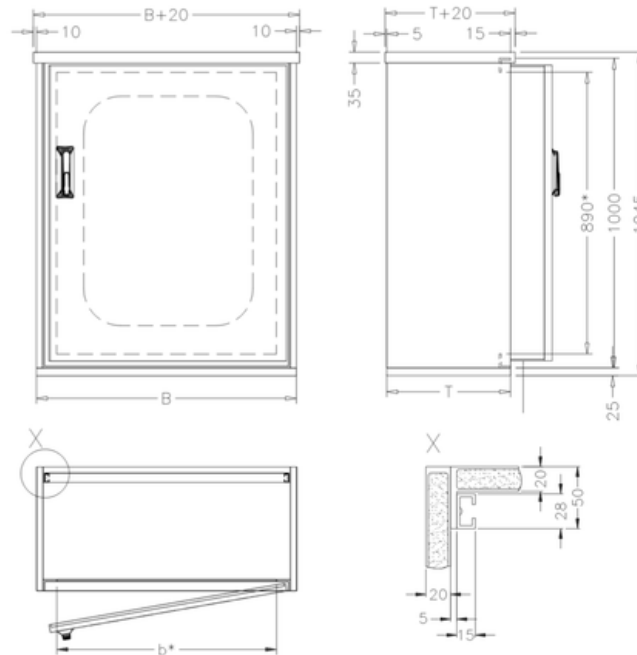

*Clear width

Type	Sizes (mm) with floor			
	H	B	b	T
100.040.030	1045	440	290	300
100.040.040				400
100.040.060				600
100.040.080				800
100.040.100				1000
100.060.030 **		640	490	300
100.060.040 **				400
100.060.060				600
100.060.080				800
100.060.100				1000

Type	Sizes (mm) with floor			
	H	B	b	T
100.080.030	1045	840	690	300
100.080.040				400
100.080.060				600
100.080.080				800
100.080.100				1000
100.100.030		1040	890	300
100.100.040				400
100.100.060				600
100.100.080				800
100.100.100				1000

*Base acc. to DIN 43629 available. (see Data-sheet SDS10830)